RevNo	Revision note	Date	Signature	Checked

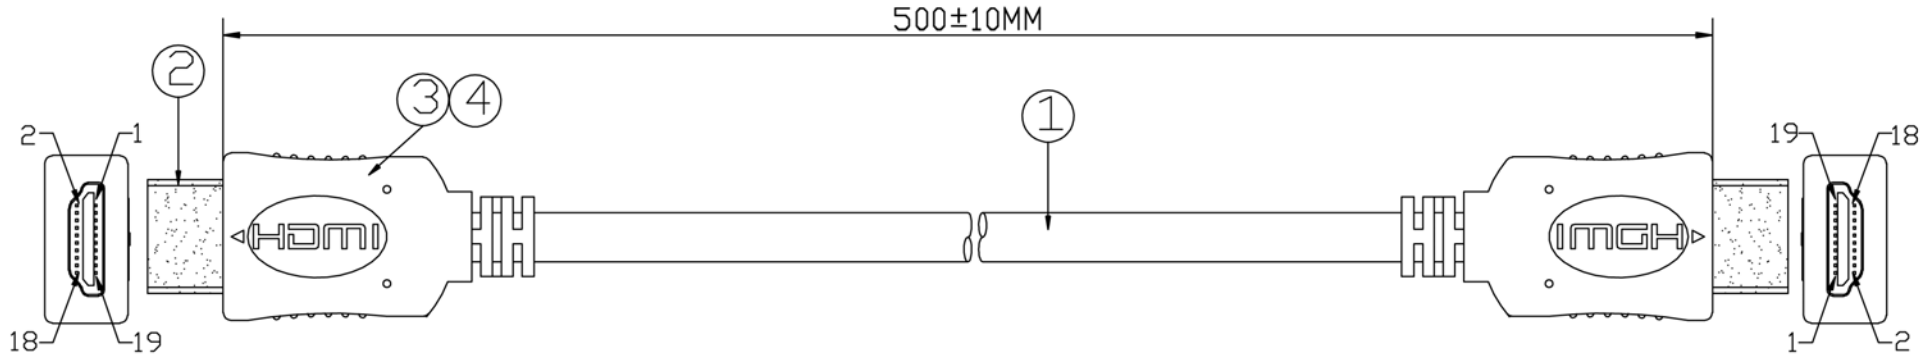

P1

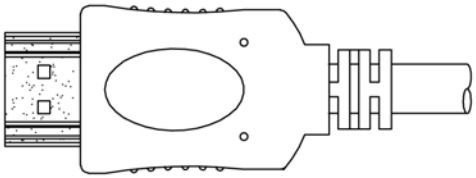

P2

PIN OUT

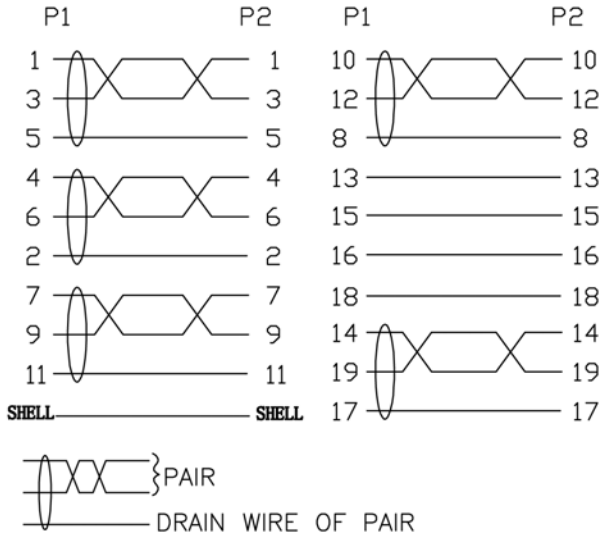

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
DC300V /10MS
Insulation resistance 10MΩ(Min)
Conduction resistance 5Ω(Max)

3:1080P testing.

NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT
④	OUTER MOLDED	BLACK 45P PVC	0.028	KG
③	INTER MOLDED	LDPE	0.028	KG
②	CONNECTOR	HDMI A TYPE MALE BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*5C+4C*30#+ADB OD:6.0±0.15 JACKET:BLACK PVC	0.5	M

Ltemref	Quantity	Title/Name,designation,material,dimension etc		Article No./Reference	
Designed by		Checked by	Approved by - date MARCH 4.2012	File name 1.4 HDMI M/M TO L=0.5M	Date MARCH 4.2012	Scale FREE
				26-7005LS	
				26-7005LS	Edition 1	Sheet 1/2